



6001 RL 8 XX

6001 SL 8 XX


X	1	LED 1x 4W / 230V
	2	LED 1x 6W / 230V
Y	2	24° Beam angle
	4	40° Beam angle
	6	60° Beam angle
	8	Anti-glare
Z	9	Sand blasted
	7	2700K (4W=340lm / 6W=432lm)
	3	3000K (4W=352lm / 6W=450lm)

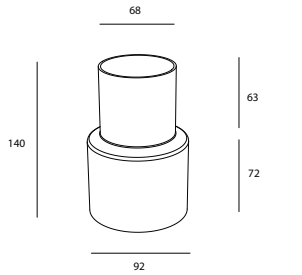

6001 ZK0000 Floorkit

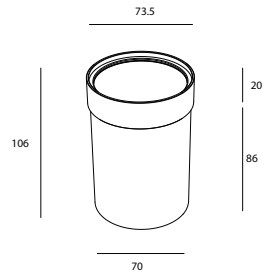

6001 ZR0001 POL round recessed floorkit

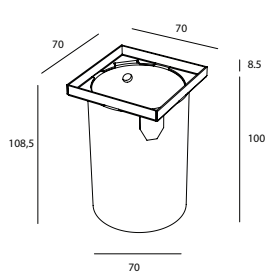


6001 ZS0001 POL square recessed floorkit



Warranty disclaimer: If the devices are not installed in accordance with the correct installation instructions, all warranty will void.

The information and Specifications in this document are subject to change without notice. da'LUX assumes no responsibility or liability for any errors or inaccuracies that may appear in this manual. Please read all instructions prior to assembly, mounting and operating the device. The installation of device must be performed by a recognized electrician and according to the national regulations on electric installations. Leave a copy of this document with person responsible for the maintenance. This document is part of the general selling conditions of da'LUX.

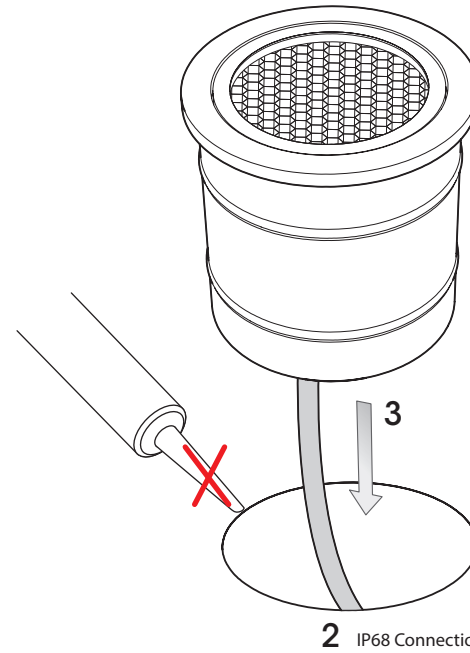

2 IP68 Connection

1

25cm
DRAINAGE

The opening for the luminaire must be above a drainage layer of 25cm (e.g. gravel). Layer suits if it's dry, 20 minutes after you filled it with water.

OK X

Do not install the luminaire into a hollow areas and mount the floorkit flush to the surface.

2

min. 30cm

Electrical connection at least IP68. Use outdoor certified cable only in accordance with the local regulations.

This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

da'lux
pure light

6001 xxxxxx xx

LED

22/12/2023-V6
874/2012