
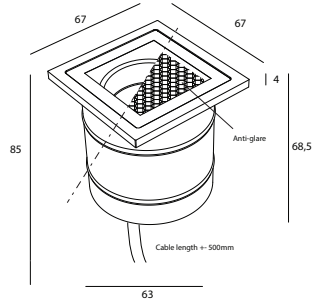


POL 350mA


da'lux  
pure light

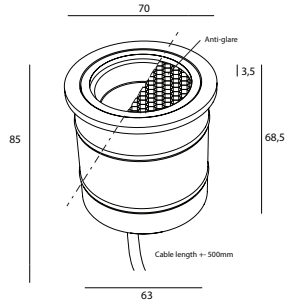


6001 RL 8 XX

6001 SL 8 XX


X	3	LED 1x 6,2W / 350mA
	1	10° Beam angle
Y	2	24° Beam angle
	4	40° Beam angle
	6	60° Beam angle
Z	8	Anti-glare
	9	Sand blasted
	7	2700K / 912lm
	3	3000K / 953lm

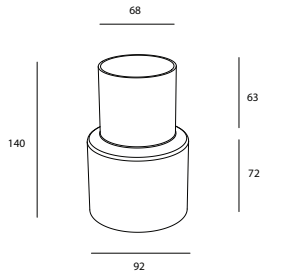

6001 ZK0000 Floorkit

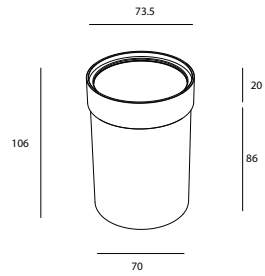

6001 ZR0001 POL round recessed floorkit

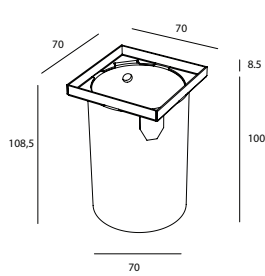

6001 ZS0001 POL square recessed floorkit



**Warranty disclaimer: If the devices are not installed in accordance with the correct installation instructions, all warranty will void.**



The information and Specifications in this document are subject to change without notice. da'LUX assumes no responsibility or liability for any errors or inaccuracies that may appear in this manual. Please read all instructions prior to assembly, mounting and operating the device. The installation of device must be performed by a recognized electrician and according to the national regulations on electric installations. Leave a copy of this document with person responsible for the maintenance. This document is part of the general selling conditions of da'LUX.

da'lux  
pure light


T +32 51 490 900  
info@da-lux.be  
www.da-lux.be

POL 350mA

da'lux  
pure light

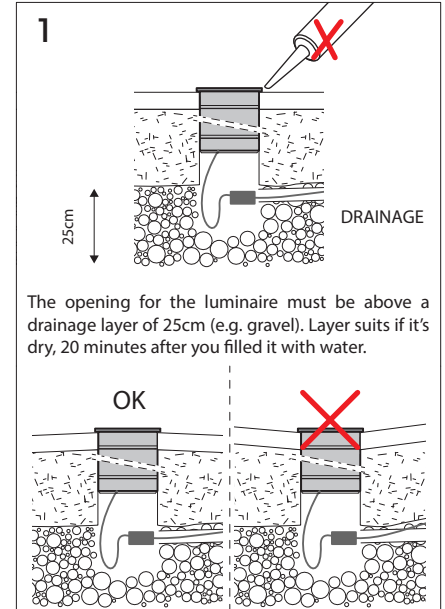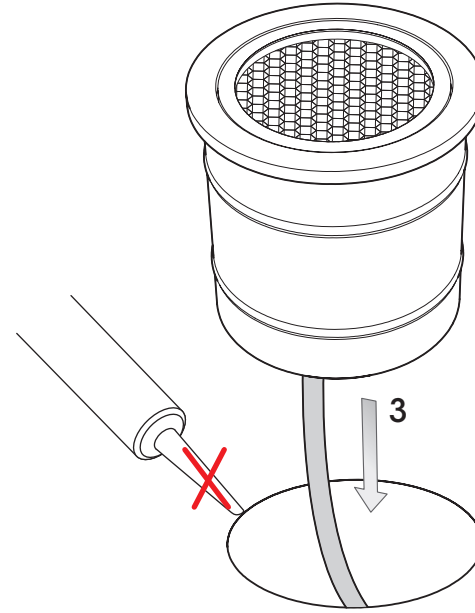

The opening for the luminaire must be above a drainage layer of 25cm (e.g. gravel). Layer suits if it's dry, 20 minutes after you filled it with water.

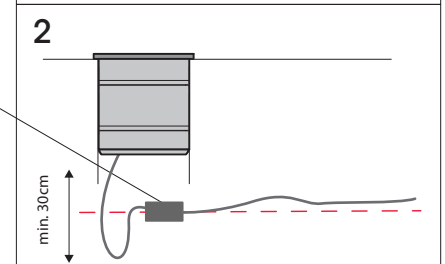

Electrical connection at least IP68. Use outdoor certified cable only in accordance with the local regulations.

This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

A++
A+
A

C
D
E

LED

22/12/2023-V6  
874/2012

da'lux  
pure light

T +32 51 490 900  
info@da-lux.be  
www.da-lux.be